PRODUCT BRIEF


Mobile Intel[®] 7 Series HM77 Express Chipset – Unparalleled Performance and Responsiveness for Consumers and Small Business Notebooks



Unparalleled Performance and Responsiveness for Consumers, Built-in IT Maintenance for Small Business

Mobile Intel® 7 Series HM77 Express Chipset and 3rd Generation Intel® Core™ Processors

For unparalleled notebook performance, look for the 3rd generation Intel® Core™ processor family and the Intel® HM77 Express Chipset. This new notebook platform features improved adaptive performance that adds speed when you need it. When combined with advanced system responsiveness, the platform delivers the ultimate notebook experience. HM77 also delivers Built-in IT for small businesses.

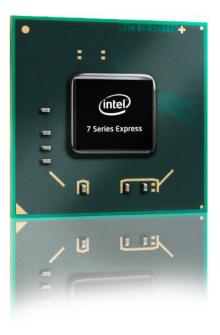

Smarter Performance

The combination of the Intel® HM77 Express Chipset and 3rd generation Intel® Core™ processors delivers incredible notebook experience. You'll get maximum power for whatever you do, thanks to the combination of smart features like Intel® Turbo Boost Technology 2.01 and Intel® Hyper-Threading Technology,2 which together activate full processing power exactly where and when you need it.

Increased Responsiveness

Intel® Smart Connect Technology3 enables instant access to your data by allowing your content to be refreshed in the standby power state—all while minimizing power consumption. In addition to faster boot and resume times, Intel® Rapid Start Technology4 provides energy efficiency without sacrificing user experience. While providing SSD-like performance and large HDD capacity at lower costs, the Intel HM77 Express Chipset features Intel® Smart Response Technology5 that boots up your notebook faster and delivers faster application loading for the most demanding enthusiast users.

Enhanced Security and Productivity with Intel[®] Small Business Advantage

With the Mobile Intel® 7 Series HM77 Express Chipset and 3rd generation Intel® Core™ processor family, small businesses are now enabled with Intel® Small Business Advantage (Intel® SBA), which has built-in IT support.1 Once configured, this state-ofthe-art technology continually monitors your security software and alerts you if it's been compromised by viruses or malware. It will automatically back-up your company's data and manage routine maintenance tasks like running software updates, defragging disk drives and deleting cookies and temporary Internet files after hours, so your employees won't be interrupted.3 PCs can also be configured to power on or off in set times in order to provide your small business with increased energy savings.

Unlocked Flexibility and Freedom

The Mobile Intel[®] 7 Series HM77 Express Chipset enables the performance tuning features of unlocked Intel Core processors, allowing the user to change the core multiplier to increase frequencies without having to run any other part of the system above specifications. Get the ultimate system performance with the flexibility to set your system specs just the way you like.

Improved Built-In Visuals


With smart performance and built-in 3D visual and graphics support, the 3rd generation Intel Core processor family will add a new dimension to your notebook experience.6 Intel[®] Quick Sync Video technology, our built-in hardware acceleration technology in all 3rd generation Intel Core processors, delivers astonishing video transcoding performance, enabling your notebook to edit, burn, and share your content faster—without the need for add-in hardware. InTru[™] 3D Technology7 delivers 3D movie playback without hesitation or interruption. The Intel HM77 Express Chipset and 3rd generation Intel Core processors now come with built-in Intel[®] Wireless Display (Intel[®] WiDi),8 allowing users to view content from their desktop notebook to an Intel[®] WiDi-enabled TV screen. The Mobile Intel[®] HM77 Express Chipset also supports up to three displays.9

The Intel HM77 Express Chipset delivers the latest platform features for superb system performance with the latest I/O technologies

The Mobile Intel® Series 7 HM77 Express Chipset integrates several capabilities to provide flexibility for connecting I/O devices. Integrated USB 3.0 support helps you connect faster to your digital life. The latest Intel® Rapid Storage Technology10 enables the full Serial ATA (SATA) interface speed of up to 6 Gb/s to support nextgeneration Solid State Drives (SSDs) and traditional Hard Disk Drives (HDDs). In addition, the Intel HM77 Express Chipset drives lower power through enhanced link power management of the Advanced Host Controller Interface (AHCI), enable easier expandability with support for native hot plug, and enhance boot and multitasking performance with Native Command Queuing (NCQ).

Intel[®] Rapid Recover Technology (part of the Intel Rapid Storage Technology suite) provides a fast, easy-to-use method for the end user to recover their data and return their system to an operational status.

Mobile Intel® 7 Series HM77 Express Chipset Block Diagram

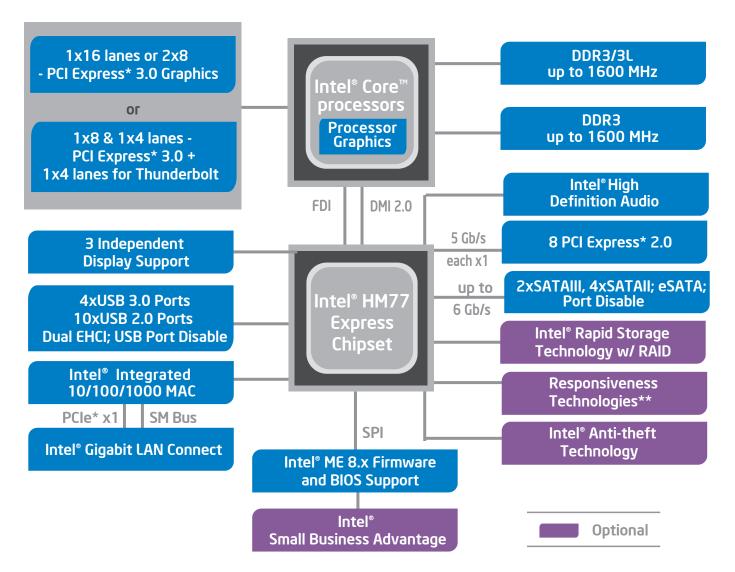

* Other Names and Brands maybe claimed as property of others.

**Includes Intel® Smart Response Technology, Intel® Rapid Start Technology, and Intel® Smart Connect Technology

Mobile Intel® 7 Series HM77 Express Chipset Features at a Glance

as multiple audio streams and jack re-tasking.Intel* Smart Response Technology5• Implements storage I/O caching for faster response times of application startup and quicker access to user data.Intel* Smart Connect Technology3• Provides faster application refresh by allowing applications to be updated in a low-power state.Intel* Rapid Start Technology4• Allows quick system resumes from the hibernate state.Universal Serial Bus 3.0• Integrated USB 3.0 support, provides greater enhancement in performance with a design data rate of up to 5 gigabits per second (Gbps) with up to 4 USB 3.0 ports.Universal Serial Bus 2.0• Hi-Speed USB 2.0 support with a design data rate of up to 480 megabits per second (Mbps) with up to 14 USB 2.0 ports.USB 2.0 Rate Matching Hub• Enables lower power requirements and manages the transition of the communication data rate from the high speed of the host controller to the lower speed of USB full-speed/low-speed devices.Serial ATA (SATA) 6 Gb/s• Next-generation high-speed storage interface supporting up to 6 Gb/s transfer rates for optimal data access with up to 2 SATA 6Gb/s ports.Serial ATA (SATA) 3 Gb/s• High-speed storage interface supporting up to 4 SATA 3Gb/s ports.SATA• SATA interface designed for use with external SATA devices. Provides a link for 3 Gb/s data speeds to eliminate bottlenecks found with current external storage solutions.SATA Port Disable• Enables individual SATA ports to be enabled or disabled as needed. This feature provides added protection of data by preventing malicious removal or insertion of data through SATA ports.PCI Express* 2.0 Interface• Offers up to 5 GT/s for fast access to peripheral devices and networking with up to 8 P	Features	Benefits
(Intel* SBA)1,2.3 their small business. Intel* Rapid Storage Technology10 • With additional hard drives added, provides quicker access to digital photo, video and data files with RAID 0, 5, and 10, and greater data protection against a hard disk drive failure with RAID 1, 5, and 10. • Support for external SATA (eSATA) enables the full SATA interface speed outside the chassis, up to 3 Gb/s. Intel* Interface speed outside the chassis, up to 3 Gb/s. Intel* Rapid Recover Technology • Interface speed outside the chassis, up to a Gb/s. Intel* fall or if there is data corruption. The clone can also be mounted as a read-only volume to allow a user to recover individual files. Intel* High Definition Audio11 • Integrated aduido support enables premium digital surround sound and delivers advanced features such as multiple audio streams and jack re-tasking. Intel* Smart Connect Technology3 • Provides faster application refresh by allowing applications to be updated in a low-power state. Intel* Rapid Start Technology4 • Allows quick system resumes from the hibernate state. Universal Serial Bus 2.0 • Hi-Speed USB 2.0 support with a design data rate of up to 5 gigabits per second (Gbps) with up to 4 USB 3.0 ports. USE 2.0 Rate Matching Hub • Enables lower power requirements and manages the transition of the communication data rate from the high speed of the host controler to the lower speed of USB full-speed/low-speed devices. Serial ATA (SATA) 6 Gb/s • Next-generation high-speed storage interface supp		Pentium [®] processor, and Intel [®] Celeron [®] processor. Mobile Intel [®] 7 Series HM77 Express Chipset also
RAID 0, 5, and 10, and greater data protection against a hard disk drive failure with RAID 1, 5, and 10. • Support for external SATA (eSATA) enables the full SATA interface speed outside the chassis, up to 3 Gb/s. Intel* Rapid Recover Technology • Intel/s latest data protection technology provides a recovery point that can be used to quickly recover a system should a hard drive fail or if there is data corruption. The clone can also be mounted as a read-only volume to allow a user to recover individual files. Intel* High Definition Audio11 • Integrated audio support enables premium digital surround sound and delivers advanced features such as multiple audio streams and jack re-tasking. Intel* Smart Response Technology3 • Implements storage I/O caching for faster response times of application startup and quicker access to user data. Intel* Smart Connect Technology4 • Allows quick system resumes from the hibernate state. Universal Serial Bus 3.0 • Integrated USB 3.0 support, provides greater enhancement in performance with a design data rate of up to 5 glgabits per second (Gbps) with up to 4 USB 3.0 ports. USB 2.0 Rate Matching Hub • Enables lower power requirements and manages the transition of the communication data rate from the high speed of the host controller to the lower speed of USB full-speed/low-speed devices. Serial ATA (SATA) 6 Gb/s • Next-generation high-speed storage interface supporting up to 6 Gb/s transfer rates for optimal data access with up to 2 SATA 6Gb/s ports. SATA Port Disable • Enables individual SATA ports to be enabled or disabled as neee		
up to 3 Gb/s.Intel* Rapid Recover Technology• Intel's latest data protection technology provides a recovery point that can be used to quickly recover a system should a hard drive fail or if there is data corruption. The clone can also be mounted as a read-only volume to allow a user to recover individual files.Intel* High Definition Audio11• Integrated audio support enables premium digital surround sound and delivers advanced features such as multiple audio streams and jack re-tasking.Intel* Smart Response Technology5• Implements storage I/O caching for faster response times of application startup and quicker access to user data.Intel* Rapid Start Technology4• Allows quick system resumes from the hibernate state.Universal Serial Bus 3.0• Integrated USB 3.0 support, provides greater enhancement in performance with a design data rate of up to 5 gigabits per second (Gbps) with up to 4 USB 3.0 ports.Universal Serial Bus 2.0• Hi-Speed USB 2.0 support with a design data rate of up to 480 megabits per second (Mbps) with up to 14 USB 3.0 ports.USB 2.0 Rate Matching Hub• Enables lower power requirements and manages the transition of the communication data rate from the high-speed of the host controller to the lower speed of USB full-speed/low-speed devices.Serial ATA (SATA) 3 Gb/s• High-speed storage interface supporting up to 6 Gb/s transfer rates for optimal data access with up to 2 SATA 6Gb/s ports.SATA port Disable• Enables lower power interface supporting up to 4 SATA 3Gb/s ports.SATA Port Disable• Enables individual SATA ports to be enabled or disabled as needed. This feature provides added protection of data by preventing malicious removal or insertion of data through SATA ports.SATA Port Disable• Enables	Intel [®] Rapid Storage Technology10	
cover a system should a hard drive fail or if there is data corruption. The clone can also be mounted as a read-only volume to allow a user to recover individual files.Intel* High Definition Audio11• Integrated audio support enables premium digital surround sound and delivers advanced features such as multiple audio streams and jack re-tasking.Intel* Smart Response Technology5• Implements storage I/O caching for faster response times of application startup and quicker access to user data.Intel* Smart Connect Technology3• Provides faster application refresh by allowing applications to be updated in a low-power state.Intel* Smart Connect Technology4• Allows quick system resumes from the hibernate state.Universal Serial Bus 3.0• Integrated USB 3.0 support, provides greater enhancement in performance with a design data rate of up to 5 gigabits per second (Gbps) with up to 4 USB 3.0 ports.Universal Serial Bus 2.0• Hi-Speed USB 2.0 support with a design data rate of up to 480 megabits per second (Mbps) with up to 14 USB 2.0 ports.USB 2.0 Rate Matching Hub• Enables lower power requirements and manages the transition of the communication data rate from the high speed of the host controller to the lower speed of USB full-speed/low-speed devices.Serial ATA (SATA) 6 Gb/s• Next-generation high-speed storage interface supporting up to 6 Gb/s transfer rates for optimal data access with up to 2 SATA 6Gb/s ports.SATA Port Disable• Enables individual SATA ports to be enabled or disabled as needed. This feature provides added protection of data by preventing malicious removal or insertion of data through SATA ports.SATA Port Disable• Offers up to 5 GT/s for fast access to peripheral devices and networking with up to		
as multiple audio streams and jack re-tasking.Intel* Smart Response Technology5. Implements storage I/O caching for faster response times of application startup and quicker access to user data.Intel* Smart Connect Technology3. Provides faster application refresh by allowing applications to be updated in a low-power state.Intel* Rapid Start Technology4. Allows quick system resumes from the hibernate state.Universal Serial Bus 3.0. Integrated USB 3.0 support, provides greater enhancement in performance with a design data rate of up to 5 gigabits per second (Gbps) with up to 4 USB 3.0 ports.Universal Serial Bus 2.0. Hi-Speed USB 2.0 support with a design data rate of up to 480 megabits per second (Mbps) with up to 14 USB 2.0 ports.USB 2.0 Rate Matching Hub. Enables lower power requirements and manages the transition of the communication data rate from the high speed of the host controller to the lower speed of USB full-speed/low-speed devices.Serial ATA (SATA) 6 Gb/s. Next-generation high-speed storage interface supporting up to 6 Gb/s transfer rates for optimal data access with up to 2 SATA 6Gb/s ports.SATA. SATA interface designed for use with external SATA devices. Provides a link for 3 Gb/s data speeds to eliminate bottlenecks found with current external storage solutions.SATA Port Disable. Enables individual SATA ports to be enabled or disabled as needed. This feature provides added protection of data by preventing malicious removal or insertion of data through SATA ports.CSPE 2.0 Interface. Offers up to 5 GT/s for fast access to be enabled or disabled as needed. This feature provides added pro- tection of data by preventing malicious removal or insertion of data through SATA ports.<	Intel® Rapid Recover Technology	cover a system should a hard drive fail or if there is data corruption. The clone can also be mounted
user data.Intel® Smart Connect Technology3• Provides faster application refresh by allowing applications to be updated in a low-power state.Intel® Rapid Start Technology4• Allows quick system resumes from the hibernate state.Universal Serial Bus 3.0• Integrated USB 3.0 support, provides greater enhancement in performance with a design data rate of up to 5 gigabits per second (Gbps) with up to 4 USB 3.0 ports.Universal Serial Bus 2.0• Hi-Speed USB 2.0 support with a design data rate of up to 480 megabits per second (Mbps) with up to 14 USB 2.0 ports.USB 2.0 Rate Matching Hub• Enables lower power requirements and manages the transition of the communication data rate from the high speed of the host controller to the lower speed of USB full-speed/low-speed devices.Serial ATA (SATA) 6 Gb/s• Next-generation high-speed storage interface supporting up to 6 Gb/s transfer rates for optimal data access with up to 2 SATA 6Gb/s ports.Serial ATA (SATA) 3 Gb/s• High-speed storage interface supporting up to 4 SATA 3Gb/s ports.SATA• SATA interface designed for use with external SATA devices. Provides a link for 3 Gb/s data speeds to eliminate bottlenecks found with current external storage solutions.SATA Port Disable• Enables individual SATA ports to be enabled or disabled as needed. This feature provides added protection of data by preventing malicious removal or insertion of data through SATA ports.PCI Express* 2.0 Interface• Offers up to 5 GT/s for fast access to peripheral devices and networking with up to 8 PCI Express 2.0 x1 ports. configurable as x2 and x4 depending on motherboard designs.USB Port Disable• Enables individual USB ports to be enabled or disabled as needed. This feature provides added protection	Intel [®] High Definition Audio11	
Intel* Rapid Start Technology4Allows quick system resumes from the hibernate state.Universal Serial Bus 3.0Integrated USB 3.0 support, provides greater enhancement in performance with a design data rate of up to 5 gigabits per second (Gbps) with up to 4 USB 3.0 ports.Universal Serial Bus 2.0Hi-Speed USB 2.0 support with a design data rate of up to 480 megabits per second (Mbps) with up to 14 USB 2.0 ports.USB 2.0 Rate Matching HubEnables lower power requirements and manages the transition of the communication data rate from the high speed of the host controller to the lower speed of USB full-speed/low-speed devices.Serial ATA (SATA) 6 Gb/sNext-generation high-speed storage interface supporting up to 6 Gb/s transfer rates for optimal data access with up to 2 SATA 6Gb/s ports.Serial ATA (SATA) 3 Gb/sHigh-speed storage interface supporting up to 4 SATA 3Gb/s ports.SATASATA interface designed for use with external SATA devices. Provides a link for 3 Gb/s data speeds to eliminate bottlenecks found with current external storage solutions.SATA Port DisableEnables individual SATA ports to be enabled or disabled as needed. This feature provides added protection of data by preventing malicious removal or insertion of data through SATA ports.PCI Express* 2.0 InterfaceOffers up to 5 GT/s for fast access to peripheral devices and networking with up to 8 PCI Express 2.0 x1 ports. configurable as x2 and x4 depending on motherboard designs.USB Port DisableEnables individual USB ports to be enabled or disabled as needed. This feature provides added pro- tection of data by preventing malicious removal or insertion of data through USB ports.USB Port DisableEnables individual USB ports to be enabled or disable	Intel [®] Smart Response Technology5	
Universal Serial Bus 3.0• Integrated USB 3.0 support, provides greater enhancement in performance with a design data rate of up to 5 gigabits per second (Gbps) with up to 4 USB 3.0 ports.Universal Serial Bus 2.0• Hi-Speed USB 2.0 support with a design data rate of up to 480 megabits per second (Mbps) with up to 14 USB 2.0 ports.USB 2.0 Rate Matching Hub• Enables lower power requirements and manages the transition of the communication data rate from the high speed of the host controller to the lower speed of USB full-speed/low-speed devices.Serial ATA (SATA) 6 Gb/s• Next-generation high-speed storage interface supporting up to 6 Gb/s transfer rates for optimal data access with up to 2 SATA 6Gb/s ports.Serial ATA (SATA) 3 Gb/s• High-speed storage interface supporting up to 4 SATA 3Gb/s ports.eSATA• SATA interface designed for use with external SATA devices. Provides a link for 3 Gb/s data speeds to eliminate bottlenecks found with current external storage solutions.SATA Port Disable• Enables individual SATA ports to be enabled or disabled as needed. This feature provides added protection of data by preventing malicious removal or insertion of data through SATA ports.PCI Express* 2.0 Interface• Offers up to 5 GT/s for fast access to peripheral devices and networking with up to 8 PCI Express 2.0 x1 ports, configurable as x2 and x4 depending on motherboard designs.USB Port Disable• Enables individual USB ports to be enabled or disabled as needed. This feature provides added pro- tection of data by preventing malicious removal or insertion of data through USB ports.USP Port Disable• Enables individual USB ports to be enabled or disabled as needed. This feature provides added pro- tection of data by preventing malicious	Intel® Smart Connect Technology3	 Provides faster application refresh by allowing applications to be updated in a low-power state.
of up to 5 gigabits per second (Gbps) with up to 4 USB 3.0 ports.Universal Serial Bus 2.0Hi-Speed USB 2.0 support with a design data rate of up to 480 megabits per second (Mbps) with up to 14 USB 2.0 ports.USB 2.0 Rate Matching HubEnables lower power requirements and manages the transition of the communication data rate from the high speed of the host controller to the lower speed of USB full-speed/low-speed devices.Serial ATA (SATA) 6 Gb/sNext-generation high-speed storage interface supporting up to 6 Gb/s transfer rates for optimal data access with up to 2 SATA 6Gb/s ports.Serial ATA (SATA) 3 Gb/sHigh-speed storage interface supporting up to 4 SATA 3Gb/s ports.eSATASATA interface designed for use with external SATA devices. Provides a link for 3 Gb/s data speeds to eliminate bottlenecks found with current external storage solutions.SATA Port DisableEnables individual SATA ports.PCI Express* 2.0 InterfaceOffers up to 5 GT/s for fast access to peripheral devices and networking with up to 8 PCI Express 2.0 x1 ports, configurable as x2 and x4 depending on motherboard designs.USB Port DisableEnables individual USB ports to be enabled or disabled as needed. This feature provides added pro- tection of data by preventing malicious removal or insertion of data through USB ports.USB Port DisableEnables individual USB ports to be enabled or disabled as needed. This feature provides added pro- tection of data by preventing malicious removal or insertion of data through USB ports.USB Port DisableSupport for the Intel® 82579LM Gigabit Network Connection.	Intel® Rapid Start Technology4	 Allows quick system resumes from the hibernate state.
to 14 USB 2.0 ports.USB 2.0 Rate Matching HubEnables lower power requirements and manages the transition of the communication data rate from the high speed of the host controller to the lower speed of USB full-speed/low-speed devices.Serial ATA (SATA) 6 Gb/s• Next-generation high-speed storage interface supporting up to 6 Gb/s transfer rates for optimal data access with up to 2 SATA 6Gb/s ports.Serial ATA (SATA) 3 Gb/s• High-speed storage interface supporting up to 4 SATA 3Gb/s ports.eSATA• SATA interface designed for use with external SATA devices. Provides a link for 3 Gb/s data speeds to eliminate bottlenecks found with current external storage solutions.SATA Port Disable• Enables individual SATA ports to be enabled or disabled as needed. This feature provides added protection of data by preventing malicious removal or insertion of data through SATA ports.PCI Express* 2.0 Interface• Offers up to 5 GT/s for fast access to peripheral devices and networking with up to 8 PCI Express 2.0 x1 ports, configurable as x2 and x4 depending on motherboard designs.USB Port Disable• Enables individual USB ports to be enabled or disabled as needed. This feature provides added pro- tection of data by preventing malicious removal or insertion of data through USB ports.USB Port Disable• Enables individual USB ports to be enabled or disabled as needed. This feature provides added pro- tection of data by preventing malicious removal or insertion of data through USB ports.Intel* Integrated 10/100/1000 MAC• Support for the Intel* 82579LM Gigabit Network Connection.	Universal Serial Bus 3.0	
the high speed of the host controller to the lower speed of USB full-speed/low-speed devices.Serial ATA (SATA) 6 Gb/s• Next-generation high-speed storage interface supporting up to 6 Gb/s transfer rates for optimal data access with up to 2 SATA 6Gb/s ports.Serial ATA (SATA) 3 Gb/s• High-speed storage interface supporting up to 4 SATA 3Gb/s ports.eSATA• SATA interface designed for use with external SATA devices. Provides a link for 3 Gb/s data speeds to eliminate bottlenecks found with current external storage solutions.SATA Port Disable• Enables individual SATA ports to be enabled or disabled as needed. This feature provides added protection of data by preventing malicious removal or insertion of data through SATA ports.PCI Express* 2.0 Interface• Offers up to 5 GT/s for fast access to peripheral devices and networking with up to 8 PCI Express 2.0 x1 ports, configurable as x2 and x4 depending on motherboard designs.USB Port Disable• Enables individual USB ports to be enabled or disabled as needed. This feature provides added pro- tection of data by preventing malicious removal or insertion of data through DSB ports.USB Port Disable• Support for the Intel* 82579LM Gigabit Network Connection.	Universal Serial Bus 2.0	
data access with up to 2 SATA 6Gb/s ports.Serial ATA (SATA) 3 Gb/sHigh-speed storage interface supporting up to 4 SATA 3Gb/s ports.eSATA• SATA interface designed for use with external SATA devices. Provides a link for 3 Gb/s data speeds to eliminate bottlenecks found with current external storage solutions.SATA Port Disable• Enables individual SATA ports to be enabled or disabled as needed. This feature provides added protection of data by preventing malicious removal or insertion of data through SATA ports.PCI Express* 2.0 Interface• Offers up to 5 GT/s for fast access to peripheral devices and networking with up to 8 PCI Express 2.0 x1 ports, configurable as x2 and x4 depending on motherboard designs.USB Port Disable• Enables individual USB ports to be enabled or disabled as needed. This feature provides added pro- tection of data by preventing malicious removal or insertion of data through USB ports.USB Port Disable• Support for the Intel® 82579LM Gigabit Network Connection.	USB 2.0 Rate Matching Hub	
eSATASATA interface designed for use with external SATA devices. Provides a link for 3 Gb/s data speeds to eliminate bottlenecks found with current external storage solutions.SATA Port DisableEnables individual SATA ports to be enabled or disabled as needed. This feature provides added protection of data by preventing malicious removal or insertion of data through SATA ports. Especially targeted for eSATA ports.PCI Express* 2.0 InterfaceOffers up to 5 GT/s for fast access to peripheral devices and networking with up to 8 PCI Express 2.0 x1 ports, configurable as x2 and x4 depending on motherboard designs.USB Port DisableEnables individual USB ports to be enabled or disabled as needed. This feature provides added pro- tection of data by preventing malicious removal or insertion of data through USB ports.Intel* Integrated 10/100/1000 MACSupport for the Intel* 82579LM Gigabit Network Connection.	Serial ATA (SATA) 6 Gb/s	
to eliminate bottlenecks found with current external storage solutions. SATA Port Disable • Enables individual SATA ports to be enabled or disabled as needed. This feature provides added protection of data by preventing malicious removal or insertion of data through SATA ports. Especially targeted for eSATA ports. PCI Express* 2.0 Interface • Offers up to 5 GT/s for fast access to peripheral devices and networking with up to 8 PCI Express 2.0 x1 ports, configurable as x2 and x4 depending on motherboard designs. USB Port Disable • Enables individual USB ports to be enabled or disabled as needed. This feature provides added protection of data by preventing malicious removal or insertion of data through USB ports. Intel* Integrated 10/100/1000 MAC • Support for the Intel* 82579LM Gigabit Network Connection.	Serial ATA (SATA) 3 Gb/s	 High-speed storage interface supporting up to 4 SATA 3Gb/s ports.
protection of data by preventing malicious removal or insertion of data through SATA ports. Especially targeted for eSATA ports.PCI Express* 2.0 Interface• Offers up to 5 GT/s for fast access to peripheral devices and networking with up to 8 PCI Express 2.0 x1 ports, configurable as x2 and x4 depending on motherboard designs.USB Port Disable• Enables individual USB ports to be enabled or disabled as needed. This feature provides added pro- tection of data by preventing malicious removal or insertion of data through USB ports.Intel® Integrated 10/100/1000 MAC• Support for the Intel® 82579LM Gigabit Network Connection.	eSATA	
2.0 x1 ports, configurable as x2 and x4 depending on motherboard designs. USB Port Disable • Enables individual USB ports to be enabled or disabled as needed. This feature provides added protection of data by preventing malicious removal or insertion of data through USB ports. Intel® Integrated 10/100/1000 MAC • Support for the Intel® 82579LM Gigabit Network Connection.	SATA Port Disable	protection of data by preventing malicious removal or insertion of data through SATA ports.
Intel® Integrated 10/100/1000 MAC • Support for the Intel® 82579LM Gigabit Network Connection.	PCI Express* 2.0 Interface	
	USB Port Disable	
Green Technology • Manufactured with lead-free and halogen-free component packages.	Intel [®] Integrated 10/100/1000 MAC	 Support for the Intel® 82579LM Gigabit Network Connection.
	Green Technology	 Manufactured with lead-free and halogen-free component packages.

For more information, visit the Intel Web site: www.intel.com/content/www/us/en/chipsets/ performance-chipsets/notebook-desktop-performance-chipsets.html

- 1 Requires a system with Intel® Turbo Boost Technology capability. Intel Turbo Boost Technology 2.0 is the next generation of Turbo Boost Technology and is only available on 2nd gen Intel® Core™ processors. Consult your notebook manufacturer. Performance varies depending on hardware, software, and system configuration. For more information, visit http://www.intel.com/technology/turboboost.
- 2 Requires an Intel® HT Technology enabled system, check with your notebook manufacturer. Performance will vary depending on the specific hardware and software used. For more information including details on which processors support HT Technology, visit http://www.intel.com/info/hyperthreading.
- 3 Requires a select Intel® processor, Intel® software and BIOS update, Intel® wireless adapter, and Internet connectivity. Solid state memory or drive equivalent may be required. Depending on system configuration, your results may vary. Contact your system manufacturer for more information.
- 4 Requires a select Intel® processor, Intel® software and BIOS update, and a small Solid-State Drive (SSD). Depending on system configuration, your results may vary. Contact your system manufacturer for more information.
- 5 Requires a select Intel® processor, enabled chipset, Intel Rapid Storage Technology software, and a properly configured SSD hard drive. Depending on system configuration, your results may vary. Contact your system manufacturer for more information.
- 6 Built-in visual features are not enabled on all notebooks and optimized software may be required. Check with your system manufacturer. Learn more at http://www.intel.com/go/biv.
- 7 Viewing stereo 3D content requires 3D glasses and a 3D-capable display. Physical risk factors may be present when viewing 3D material
- 8 Requires an Intel® Wireless Display-enabled system, compatible adapter, and TV. 1080p and Blu ray* or other protected content playback only available on 2nd or 3rd gen Intel® Core TM processor-based notebooks with built-in visuals enabled, a compatible adapter and media player, and supporting Intel WIDi software and graphics driver installed. Consult your notebook manufacturer. For more information, see www. intel.com/go/widi. 9 Requires the use of a 3rd Generation Intel® Core TM processor. This feature is dependent on your system configuration.
- 10Intel® Rapid Storage Technology requires the computer have an Intel RST-enabled Intel chipset, RAID controller in the BIOS enabled and the Intel Rapid Storage Technology software driver installed. Please consult your system vendor for more information.
- 11Requires an Intel® HD Audio enabled system. Consult your notebook manufacturer for more information. Sound quality will depend on equipment and actual implementation. For more information about Intel® HD Audio, refer to http://www.intel.com/design/chipsets/hdaudio.htm.
- INFORMATION IN THIS DOCUMENT IS PROVIDED IN CONNECTION WITH INTEL® PRODUCTS. NO LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED BY THIS DOCUMENT. EXCEPT AS PROVIDED IN INTEL'S TERMS AND CONDITIONS OF SALE FOR SUCH PRODUCTS, INTEL ASSUMES NO LIABILITY WHATSOEVER, AND INTEL DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY, RELATING TO SALE AND/OR USE OF INTEL PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRIGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.
- Intel may make changes to specifications and product descriptions at any time, without notice. Designers must not rely on the absence or characteristics of any features or instructions marked "reserved" or "undefined." Intel reserves these for future definition and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to them. The information here is subject to change without notice. Do not finalize a design with this information. The products described in this document may contain design defects or errors known as errata which may cause the product to deviate from published specifications. Current characterized errata are available on request. Contact your local Intel sales office or your distributor to obtain the latest specifications and before placing your product order. Copies of documents which have an order number and are referenced in this document, or other Intel literature, may be obtained by calling 1-800-548-4725, or by visiting Intel's Web Site http://www.intel.com.

Copyright © 2012 Intel Corporation. All rights reserved. Intel, the Intel logo, Intel Core, InTru, Pentium, Celeron, Thunderbolt, and Intel inside are trademarks of Intel Corporation in the U.S. and other countries. *Other names and brands may be claimed as the property of others.

